



Compact Utility Tractors

2R, 3D, 3E & 3R Series / 30-40HP

	2032R	2038R	3032E	3038E
ENGINE TYPE	Yanmar Liq-Cooled Diesel	Yanmar Liq-Cooled Diesel	Yanmar Liq-Cooled Diesel	Yanmar Liq-Cooled Diesel
ENGINE HP / PTO HP	*31.2HP/24.2HP	*36.7HP/30.4HP	*30.7HP/25.0HP	*36.7HP/30.0HP
FUEL CAPACITY	8.5 U.S. gal.	8.5 U.S. gal.	7.5 U.S. gal.	7.5 U.S. gal.
HYDRAULIC CAPACITY	9.3 g/m	9.3 g/m	9.3 g/m	9.3 g/m
DRIVE TRAIN	4WD 2-Range Hydrostatic	4WD 2-Range Hydrostatic	4WD 2-Range Hydrostatic	4WD 2-Range Hydrostatic
BRAKES	Wet Disk	Wet Disk	Wet Disk	Wet Disk
FRONT/REAR TIRES R4	23x8.5-14/14-17.5	23x8.5-14/14-17.5	25x8.5-14/15-19.5	25x8.5-14/15-19.5
3-POINT LIFT CAPACITY	1,356 lb (24 in. Behind)	1,356 lb (24 in. Behind)	1,356 lb (24 in. Behind)	1,356 lb (24 in. Behind)
3-POINT LIFT TYPE	Category 1	Category 1	Category 1	Category 1
PTO TYPE	Independent	Independent	Independent	Independent
APPROX SHIP WEIGHT	2,436 lb	2,910 lb	2,654 lb	2,668 lb
LENGTH/WIDTH/HEIGHT	126.0 in./55.1 in./92.3 in.	126.0 in./55.1 in./92.3 in.	115.5 in./58.0 in./95.3 in.	115.5 in./58.0 in./95.3 in.
WARRANTY	**10-Year/1,000-Hour	**10-Year/1,000-Hour	**10-Year/1,000-Hour	**10-Year/1,000-Hour
FRONT LOADER	220R Optional	220R Optional	300E Optional	300E Optional
LDR LIFT HEIGHT/CAP	85.0 in./1,120 lb	85.0 in./1,120 lb	84.0 in./1,186 lb	84.0 in./1,186 lb
BACKHOE	270B Optional	270B Optional	370B Optional	370B Optional

	3035D	3033R	3039R
ENGINE TYPE	Yanmar Liq-Cooled Diesel	Yanmar Liq-Cooled Diesel	Yanmar Liq-Cooled Diesel
ENGINE HP / PTO HP	*34.4HP/30.4HP	*31.8HP/23.0HP	*38.7HP/32.8HP
FUEL CAPACITY	9.7 U.S. gal.	10.0 U.S. gal.	10.0 U.S. gal.
HYDRAULIC CAPACITY	10.3 g/m	15.3 g/m	15.3 g/m
DRIVE TRAIN	4WD 8F-8R Shuttle	4WD 3-Range eHydro / 4WD 12F-12R Reverser	4WD 3-Range eHydro
BRAKES	Wet Disk	Multi-Plate Wet Disk	Multi-Plate Wet Disk
FRONT/REAR TIRES R4	25x8.5-14/15-19.5	25x8.5-14/15-19.5	25x8.5-14/15-19.5
3-POINT LIFT CAPACITY	2,081 lb (24 in. Behind)	2,194 lb (24 in. Behind)	2,194 lb (24 in. Behind)
3-POINT LIFT TYPE	Category 1	Category 1	Category 1
PTO TYPE	Mechanical	Independent	Independent
APPROX SHIP WEIGHT	2,811 lb	2,983 lb / 3,570 lb†	2,983 lb / 3,570 lb†
LENGTH/WIDTH/HEIGHT	115.7 in./58.0 in./92.1 in.	123.8 in./58.9 in./92.8 in.	123.8 in./58.9 in./92.8 in.
WARRANTY	**10-Year/1,000-Hour	**10-Year/1,000-Hour	**10-Year/1,000-Hour
FRONT LOADER	300E Optional	300R / 320R Optional	300R / 320R Optional
LDR LIFT HEIGHT/CAP	84.0 in./1,186 lb	Up to 102.0 in./1,598 lb	Up to 102.0 in./1,598 lb
BACKHOE	N/A	375A / 385A Optional	375A / 385A Optional

*Engine HP is provided by the engine manufacturer to be used for comparison purposes only. Actual operating HP will be less. Refer to the engine manufacturer's website for additional information.

**Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com for details.

†When two weights are shown, the heavier weight denotes a factory-installed cab option.



For a full list of equipment specs,
current inventory, buy online, online
credit applications & more, visit us at
www.JamesRiverEquipment.com



JAMES RIVER
EQUIPMENT

©James River Equipment (1/2024)

Compact Utility Tractors

2R, 3D, 3E & 3R Series / 30-40HP



JOHN DEERE



JAMES RIVER
EQUIPMENT

2R Series (24.2-36.7HP)

- Final Tier 4 compliant liquid-cooled 3-cylinder diesel engines
- Two-speed hydrostatic transmission with TwinTouch™ pedals, 4WD, power steering, cruise control, tilt steering wheel and differential lock all come standard
- Open station ROPS or factory-installed heated cab (2025R only)
- 120R or 220R loaders, 206B backhoe and 54D/60D/72D AutoConnect™ drive-over mower decks can be removed without tools in less than 5 minutes



3D Series (24.7-42.2HP)

- Final Tier 4 compliant liquid-cooled 3-cylinder diesel engines
- 4WD, syncromesh shuttle gear drive transmission with 8F-8R gears, column-mounted forward/reverse lever, power steering, and differential lock all come standard
- Open station ROPS with flat operator platform
- Optional iMatch™ Quick Hitch, Quik Knect™ and telescoping draft links make attaching implements fast & easy



3E Series (24.7-37.3HP)

- Final Tier 4 compliant liquid-cooled 3-cylinder diesel engines
- 4WD, two-speed hydrostatic transmission with TwinTouch™ pedals, power steering, and differential lock all come standard
- Open station ROPS with flat operator platform
- Optional iMatch™ Quick Hitch, Quik Knect™ and telescoping draft links make attaching implements fast & easy

3R Series (32.2-45.3HP)

- Final Tier 4 compliant liquid-cooled 3-cylinder diesel engines
- 4WD, three-speed hydrostatic transmission with TwinTouch™ pedals or 12F-12R reverser transmission, power steering, tilt-steering and differential lock all come standard
- Open station ROPS or optional cab with heat & A/C
- Optional iMatch™ Quick Hitch, Quik Knect™ and telescoping draft links make attaching implements fast & easy



Key features (varies by model):



You may not need 4WD every day, but some days nothing else will do.




Sloped hood design gives you the visibility you need for front loader work.



We're green through-and-through; our hoods are tough & rust-proof.



Change or remove a front loader attachment *without* tools in seconds.

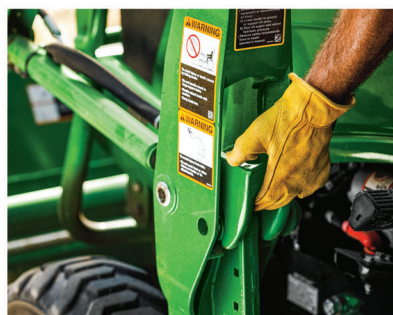

Remove and park your front loader in minutes, safely and without tools.



Access your engine easily with hoods that stay open without a prop rod.



Category 1 iMatch™ Quick Hitches make attaching to implements a breeze.



Add extra rear and/or front work lights for working late.



Quik Knect™ PTO receivers make for easy PTO connections in seconds.



Up your versatility by changing out your standard carrier for a skid steer carrier.



Canopy kits help to keep you cool and in the shade.

Most popular attachments (varies by model):

**Ask about our
Extended Warranty
Protection Plans,
starting at just
\$699!**