



## Compact Utility Tractors

### 3D, 3R, 4M & 4R Series / 40-75HP

|                       | 3043D                       | 3046R  | 4052M HD                    | 4066M HD                    |
|-----------------------|-----------------------------|--|-----------------------------|-----------------------------|
| ENGINE TYPE           | Yanmar Liq-Cooled Diesel    | Yanmar Liq-Cooled Diesel                     | Yanmar Liq-Cooled Diesel    | Yanmar Liq-Cooled Diesel    |
| ENGINE HP / PTO HP    | *41.6HP/36.3HP              | *44.7HP/33.9HP                               | *51.5HP/40.9HP              | *65.9HP/51.9HP              |
| FUEL CAPACITY         | 9.7 U.S. gal.               | 10.0 U.S. gal.                               | 15.0 U.S. gal.              | 15.0 U.S. gal.              |
| HYDRAULIC CAPACITY    | 10.3 g/m                    | 15.3 g/m                                     | 17.4 g/m                    | 17.4 g/m                    |
| DRIVE TRAIN           | 4WD 8F-8R Shuttle           | 4WD 3-Range eHydro /<br>4WD 12F-12R Reverser | 4WD 3-Range eHydro          | 4WD 3-Range eHydro          |
| BRAKES                | Wet Disk                    | Multi-Plate Wet Disk                         | Multi-Plate Wet Disk        | Multi-Plate Wet Disk        |
| FRONT/REAR TIRES R4   | 25x8.5-14/15-19.5           | 27x8.5-15/43x16-20                           | 31.5x13-16.5/16.9-24        | 31.5x13-16.5/16.9-24        |
| 3-POINT LIFT CAPACITY | 2,081 lb (24" Behind)       | 2,194 lb (24" Behind)                        | 2,500 lb (24" Behind)       | 2,500 lb (24" Behind)       |
| 3-POINT LIFT TYPE     | Category 1                  | Category 1                                   | Category 1 & 2              | Category 1 & 2              |
| PTO TYPE              | Mechanical                  | Independent                                  | Independent                 | Independent                 |
| APPROX SHIP WEIGHT    | 2,840 lb                    | 2,983 lb / 3,570 lb†                         | 4,255 lb                    | 4,290 lb                    |
| LENGTH/WIDTH/HEIGHT   | 115.7 in./58.0 in./92.1 in. | 123.8 in./59.7 in./92.8 in.                  | 134.7 in./71.3 in./95.5 in. | 134.7 in./71.3 in./95.5 in. |
| WARRANTY              | **10-Year/1,000-Hour        | **10-Year/1,000-Hour                         | **10-Year/1,000-Hour        | **10-Year/1,000-Hour        |
| FRONT LOADER          | 300E Optional               | 300R / 320R Optional                         | 440R‡                       | 440R‡                       |
| LDR LIFT HEIGHT/CAP   | 84.0 in./1,186 lb           | Up to 102.0 in./1,598 lb                     | 110.0 in./2,539 lb          | 110.0 in./2,539 lb          |
| BACKHOE               | N/A                         | 375A / 385A Optional                         | N/A                         | N/A                         |

|                       | 4044M/R                                     | 4052M/R                                     | 4066M/R                                     | 4075R                       |
|-----------------------|---|---|---|-----------------------------|
| ENGINE TYPE           | Yanmar Liq-Cooled Diesel                    | Yanmar Liq-Cooled Diesel                    | Yanmar Liq-Cooled Diesel                    | Yanmar Liq-Cooled Diesel    |
| ENGINE HP / PTO HP    | *43.1HP/32.3HP                              | *51.5HP/39.0HP                              | *65.9HP/51.9HP                              | *74.6HP/60.0HP              |
| FUEL CAPACITY         | 15.0 U.S. gal.                              | 15.0 U.S. gal.                              | 15.0 U.S. gal.                              | 14.7 U.S. gal.              |
| HYDRAULIC CAPACITY    | 17.4 g/m                                    | 17.4 g/m                                    | 17.4 g/m                                    | 17.4 g/m                    |
| DRIVE TRAIN           | 4WD 3-Range Hydro /<br>4WD 12F-12R Reverser | 4WD 3-Range Hydro /<br>4WD 12F-12R Reverser | 4WD 3-Range Hydro /<br>4WD 12F-12R Reverser | 4WD 3-Range Hydro           |
| BRAKES                | Multi-Plate Wet Disk                        | Multi-Plate Wet Disk                        | Multi-Plate Wet Disk                        | Multi-Plate Wet Disk        |
| FRONT/REAR TIRES R4   | 10-16.5/16.9Lx24                            | 10-16.5/16.9Lx24                            | 10-16.5/16.9Lx24                            | 10-16.5/16.9Lx24            |
| 3-POINT LIFT CAPACITY | 2,500 lb (24" Behind)                       | 2,500 lb (24" Behind)                       | 2,500 lb (24" Behind)                       | 2,500 lb (24" Behind)       |
| 3-POINT LIFT TYPE     | Category 1                                  | Category 1                                  | Category 1                                  | Category 1                  |
| PTO TYPE              | Independent                                 | Independent                                 | Independent                                 | Independent                 |
| APPROX SHIP WEIGHT    | 3,759 lb / 4,675 lb†                        | 3,770 lb / 4,675 lb†                        | 3,770 lb / 4,675 lb†                        | 4,675 lb†                   |
| LENGTH/WIDTH/HEIGHT   | 128.2 in./72.0 in./96.1 in.                 | 128.2 in./72.0 in./96.1 in.                 | 128.2 in./72.0 in./96.1 in.                 | 128.2 in./72.0 in./96.1 in. |
| WARRANTY              | **10-Year/1,000-Hour                        | **10-Year/1,000-Hour                        | **10-Year/1,000-Hour                        | **10-Year/1,000-Hour        |
| FRONT LOADER          | 400E / 440R‡ Optional                       | 400E / 440R‡ Optional                       | 400E / 440R‡ Optional                       | 440R‡                       |
| LDR LIFT HEIGHT/CAP   | Up to 112.1 in./2,539 lb                    | Up to 112.1 in./2,539 lb                    | Up to 112.1 in./2,539 lb                    | Up to 112.1 in./2,539 lb    |
| BACKHOE               | 485A Optional                               | 485A Optional                               | 485A Optional                               | 485A Optional               |

\*Engine HP is provided by the engine manufacturer to be used for comparison purposes only. Actual operating HP will be less. Refer to the engine manufacturer's website for additional information.

\*\*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com for details.

†When two weights are shown, the heavier weight denotes a factory-installed cab option. ‡440R loader only available on 4R series tractors.



For a full list of equipment specs,  
current inventory, buy online, online  
credit applications & more, visit us at  
[www.JamesRiverEquipment.com](http://www.JamesRiverEquipment.com)



JAMES RIVER  
EQUIPMENT

©James River Equipment (1/2024)

## Compact Utility Tractors

### 3D, 3R, 4M & 4R Series / 40-75HP



JOHN DEERE



JAMES RIVER  
EQUIPMENT



## 3D Series (24.7-42.2HP)

- Final Tier 4 compliant liquid-cooled 3-cylinder diesel engines
- 4WD, synchromesh shuttle two-speed gear drive transmission with 8F-8R gears, column-mounted forward/reverse lever, power steering, and differential lock all come standard
- Open station ROPS with flat operator platform
- Optional iMatch™ Quick Hitch, Quik Knect™ and telescoping draft links make attaching implements fast & easy



## 3R Series (32.2-45.3HP)

- Final Tier 4-compliant liquid-cooled 3-cylinder diesel engines
- 4WD, three-speed hydrostatic transmission or 12F-12R reverser transmission, power steering, tilt-steering and differential lock all come standard
- Open station ROPS or optional cab with heat & A/C
- Optional iMatch™ Quick Hitch, Quik Knect™ and telescoping draft links make attaching implements fast & easy



## 4R Series (43.1-74.6HP)

- Final Tier 4-compliant liquid-cooled 4-cylinder diesel engines
- 4WD, three-speed hydrostatic transmission or 12F-12R reverser transmission, power steering, tilt-steering and differential lock all come standard
- Open station ROPS or optional cab with heat & A/C
- Optional iMatch™ Quick Hitch, Quik Knect™ and telescoping draft links make attaching implements fast & easy



## Compact Utility Tractors / 40-75HP

## 4M Series (43.1-65.9HP)

- Final Tier 4-compliant liquid-cooled 4-cylinder diesel engines
- 4WD, three-speed hydrostatic or 12F-12R reverser transmission, power steering, and differential lock all come standard
- Open station ROPS with flat operator platform
- Optional iMatch™ Quick Hitch, Quik Knect™ and telescoping draft links make attaching implements fast & easy

### Key features (varies by model):



You may not need 4WD every day, but some days nothing else will do.



Sloped hood design gives you the visibility you need for front loader work.



We're green through-and-through; our hoods are tough & rust-proof.



Category 1 iMatch™ Quick Hitches make attaching to implements a breeze.




Add extra rear and/or front work lights for working late.



Quik Knect™ PTO receivers make for easy PTO connections in seconds.



Change or remove a front loader attachment *without* tools in seconds.

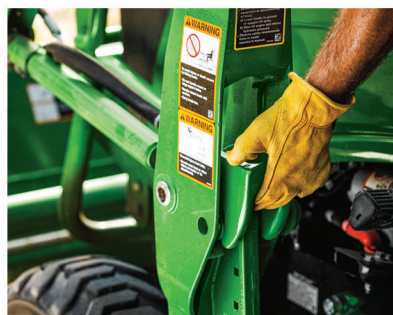

Remove and park your front loader in minutes, safely and without tools.



Access your engine easily with hoods that stay open without a prop rod.



Up your versatility by changing out your standard carrier for a skid steer carrier.



Canopy kits help to keep you cool and in the shade.

### Most popular attachments (varies by model):

**Ask about our  
Extended Warranty  
Protection Plans,  
starting at just  
\$699!**