



## Compact Utility Tractors

1, 2R, 3D & 3E Series / Under 30HP

|                       | 1023E                       | 1025R                       | 1025R FILB                  |
|-----------------------|-----------------------------|-----------------------------|-----------------------------|
| ENGINE TYPE           | Yanmar Liq-Cooled Diesel    | Yanmar Liq-Cooled Diesel    | Yanmar Liq-Cooled Diesel    |
| ENGINE HP / PTO HP    | *21.5HP/14.9HP              | *23.9HP/17.2HP              | *23.9HP/17.2HP              |
| FUEL CAPACITY         | 6.3 U.S. gal.               | 6.3 U.S. gal.               | 6.3 U.S. gal.               |
| HYDRAULIC CAPACITY    | 6.3 g/m                     | 6.3 g/m                     | 6.3 g/m                     |
| DRIVE TRAIN           | 4WD 2-Range Hydrostatic     | 4WD 2-Range Hydrostatic     | 4WD 2-Range Hydrostatic     |
| BRAKES                | Wet Disk                    | Wet Disk                    | Wet Disk                    |
| FRONT/REAR TIRES R4   | 18x8.5-10/26x12.0-12        | 18x8.5-10/26x12.0-12        | 18x8.5-10/26x12.0-12        |
| 3-POINT LIFT CAPACITY | 758 lb (24 in. Behind)      | 758 lb (24 in. Behind)      | 758 lb (24 in. Behind)      |
| 3-POINT LIFT TYPE     | Limited Category 1          | Limited Category 1          | Limited Category 1          |
| PTO TYPE              | Independent                 | Independent                 | Independent                 |
| APPROX SHIP WEIGHT    | 1,446 lb                    | 1,556 lb                    | 2,791lb                     |
| LENGTH/WIDTH/HEIGHT   | 108.3 in./47.3 in./91.3 in. | 108.3 in./47.3 in./91.3 in. | 156.0 in./47.3 in./91.3 in. |
| WARRANTY              | **10-Year/1,000-Hour        | **10-Year/1,000-Hour        | **10-Year/1,000-Hour        |
| FRONT LOADER          | 120R Optional               | 120R Optional               | 120R Standard               |
| LDR LIFT HEIGHT/CAP   | 72.0 in./754 lb             | 72.0 in./754 lb             | 72.0 in./754 lb             |
| BACKHOE               | 260B Optional               | 260B Optional               | 260B Standard               |

|                       | 2025R                       | 2025R FILB                  | 3025D                       | 3025E                       |
|-----------------------|-----------------------------|-----------------------------|-----------------------------|-----------------------------|
| ENGINE TYPE           | Yanmar Liq-Cooled Diesel    | Yanmar Liq-Cooled Diesel    | Yanmar Liq-Cooled Diesel    | Yanmar Liq-Cooled Diesel    |
| ENGINE HP / PTO HP    | *23.9HP/17.2HP              | *23.9HP/17.2HP              | *24.4HP/20.7HP              | *24.4HP/17.4HP              |
| FUEL CAPACITY         | 6.2 U.S. gal.               | 6.2 U.S. gal.               | 9.7 U.S. gal.               | 7.5 U.S. gal.               |
| HYDRAULIC CAPACITY    | 7.0 g/m                     | 7.0 g/m                     | 8.9 g/m                     | 9.3 g/m                     |
| DRIVE TRAIN           | 4WD 2-Range Hydrostatic     | 4WD 2-Range Hydrostatic     | 4WD 8F-8R Shuttle           | 4WD 2-Range Hydrostatic     |
| BRAKES                | Wet Disk                    | Wet Disk                    | Wet Disk                    | Wet Disk                    |
| FRONT/REAR TIRES R4   | 23x8.5-12/12-16.5           | 23x8.5-12/12-16.5           | 25x8.5-14/15-19.5           | 25x8.5-14/15-19.5           |
| 3-POINT LIFT CAPACITY | 915 lb (24 in. Behind)      | 915 lb (24 in. Behind)      | 2,081 lb (24 in. Behind)    | 1,356 lb (24 in. Behind)    |
| 3-POINT LIFT TYPE     | Limited Category 1          | Limited Category 1          | Category 1                  | Category 1                  |
| PTO TYPE              | Independent                 | Independent                 | Mechanical                  | Independent                 |
| APPROX SHIP WEIGHT    | 1,872 lb                    | 3,028 lb                    | 2,778 lb                    | 2,603 lb                    |
| LENGTH/WIDTH/HEIGHT   | 112.5 in./47.3 in./93.8 in. | 160.0 in./47.3 in./93.8 in. | 115.7 in./58.0 in./92.1 in. | 115.5 in./58.0 in./95.3 in. |
| WARRANTY              | **10-Year/1,000-Hour        | **10-Year/1,000-Hour        | **10-Year/1,000-Hour        | **10-Year/1,000-Hour        |
| FRONT LOADER          | 120R Optional               | 120R Optional               | 300E Optional               | 300E Optional               |
| LDR LIFT HEIGHT/CAP   | 72.0 in./803 lb             | 72.0 in./803 lb             | 84.0 in./1,186 lb           | 84.0 in./1,186 lb           |
| BACKHOE OPTION        | 260B Optional               | 260B Standard               | N/A                         | 370B Optional               |

\*Engine HP is provided by the engine manufacturer to be used for comparison purposes only. Actual operating HP will be less. Refer to the engine manufacturer's website for additional information.  
\*\*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com for details.



For a full list of equipment specs,  
current inventory, buy online, online  
credit applications & more, visit us at  
[www.JamesRiverEquipment.com](http://www.JamesRiverEquipment.com)



JAMES RIVER  
EQUIPMENT

©James River Equipment (1/2024)

## Compact Utility Tractors

1, 2R, 3D & 3E Series / Under 30HP



JOHN DEERE



JAMES RIVER  
EQUIPMENT



## 1 Series (21.5-23.9HP)

- Final Tier 4 compliant liquid-cooled 3-cylinder diesel engines
- Two-speed hydrostatic transmission with TwinTouch™ pedals, 4WD, power steering and differential lock all come standard
- Open station ROPS or factory-installed heated cab (1025R only)
- 120R loader, 260B backhoe and 54D/60D AutoConnect™ drive-over mower decks can be removed without tools in less than 5 minutes



## 2R Series (24.2-36.7HP)

- Final Tier 4 compliant liquid-cooled 3-cylinder diesel engines
- Two-speed hydrostatic transmission with TwinTouch™ pedals, 4WD, power steering, cruise control, tilt steering wheel and differential lock all come standard
- Open station ROPS or factory-installed heated cab (2025R only)
- 120R loader, 260B backhoe and 54D/60D AutoConnect™ drive-over mower decks can be removed without tools in less than 5 minutes




## Key features (varies by model):



You may not need 4WD every day, but some days nothing else will do.



Sloped hood design gives you the visibility you need for front loader work.

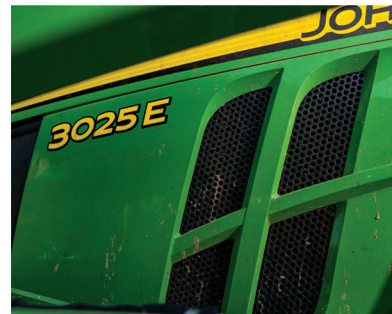

We're green through-and-through; our hoods are tough & rust-proof.



Change or remove a front loader attachment *without* tools in seconds.



Remove and park your front loader in minutes, safely and without tools.



Access your engine easily with hoods that stay open without a prop rod.



## 3D Series (24.7-42.2HP)

- Final Tier 4 compliant liquid-cooled 3-cylinder diesel engines
- 4WD, syncromesh shuttle gear drive transmission with 8F-8R gears, column-mounted forward/reverse lever, power steering, and differential lock all come standard
- Open station ROPS with flat operator platform
- Optional iMatch™ Quick Hitch, Quik Knect™ and telescoping draft links make attaching implements fast & easy

## 3E Series (24.7-37.3HP)

- Final Tier 4 compliant liquid-cooled 3-cylinder diesel engines
- 4WD, two-speed hydrostatic transmission with TwinTouch™ pedals, power steering, and differential lock all come standard
- Open station ROPS with flat operator platform
- Optional iMatch™ Quick Hitch, Quik Knect™ and telescoping draft links make attaching implements fast & easy
- Add an optional 370B backhoe to tackle any dig



## Most popular attachments (varies by model):



Category 1 iMatch™ Quick Hitches make attaching to implements a breeze.



Add extra rear and/or front work lights for working late.



Quik Knect™ PTO receivers make for easy PTO connections in seconds.



3-point tractor receiver hitches make moving trailers easy.



Canopy kits help to keep you cool and in the shade.

