



# Riding Lawn Mowers S100 & S200 Series

	S110	S120	S130	S140
ENGINE (HP)	*19HP 33R877 M33 B&S	*22HP 44N677 M44 B&S	*22HP 44N677 M44 B&S	*22HP 44N677 M44 B&S
WIDTH OF CUT	Edge™ 42 in.	Edge™ 42 in.	Edge™ 42 in.	Edge™ 48 in.
FUEL TANK CAPACITY	2.4 U.S. gal.	2.4 U.S. gal.	2.4 U.S. gal.	2.4 U.S. gal.
DRIVE TRAIN	TLT200 Hydrostatic	TLT200 Hydrostatic	TLT200 Hydrostatic	TLT200 Hydrostatic
FORWARD/REV SPEED	0-5.5 mph/0-3.2 mph	0-5.5 mph/0-3.2 mph	0-5.5 mph/0-3.2 mph	0-5.5 mph/0-3.2 mph
FRONT/REAR TIRES	15x6.0-6/20x8.0-8	15x6.0-6/20x8.0-8	15x6.0-6/20x10.0-8	15x6.0-6/20x8.0-8
OPEN BACK SEAT	15 in. Open-Back	15 in. Open-Back	15 in. Open-Back	15 in. Open-Back
FLOORMAT	Standard	Standard	Standard	Standard
DECK THICKNESS	13 Gauge, 0.090 in.	13 Gauge, 0.090 in.	13 Gauge, 0.090 in.	12 Gauge, 0.105 in.
DECK LIFT SYSTEM	Spring-Assisted Hand Lift	Spring-Assisted Hand Lift	Spring-Assisted Hand Lift	Spring-Assisted Hand Lift
MULCH CAPABILITY	Optional Cover / Plug	Optional Cover / Plug	Optional Cover / Plug	Optional Cover
OVERALL LENGTH	69.7 in.	69.7 in.	69.7 in.	69.7 in.
WIDTH (Deflector Raised)	46.5 in.	46.5 in.	46.5 in.	51.7 in.
WEIGHT (No Fuel)	414 lb	444 lb	462 lb	468 lb
WARRANTY	**2-Year/120-Hour	**2-Year/120-Hour	**2-Year/120-Hour	**2-Year/120-Hour

	S220	S240-42	S240-48
ENGINE (HP)	*22HP 44J6 Cyclonic B&S	*21.5HP FR651V Kaw	*21.5HP FR651V Kaw
WIDTH OF CUT	Accel Deep™ 42 in.	Accel Deep™ 42 in.	Accel Deep™ 48 in.
FUEL TANK CAPACITY	2.4 U.S. gal.	2.4 U.S. gal.	2.4 U.S. gal.
DRIVE TRAIN	TLT200 Hydrostatic	K46 Hydrostatic	K46 Hydrostatic
FORWARD/REV SPEED	0-5.5 mph/0-3.2 mph	0-5.5 mph/0-3.2 mph	0-5.5 mph/0-3.2 mph
FRONT/REAR TIRES	15x6.0-6/20x10.0-8	15x6.0-6/20x10.0-8	15x6.0-6/20x10.0-8
OPEN BACK SEAT	15 in. Open-Back w/ Grasp	15 in. Open-Back w/ Grasp	15 in. Open-Back w/ Grasp
FLOORMAT	Standard	Standard	Standard
DECK THICKNESS	12 Gauge, 0.105 in.	12 Gauge, 0.105 in.	10 Gauge, 0.135 in.
DECK LIFT SYSTEM	Spring-Assisted Hand Lift	Spring-Assisted Hand Lift	Spring-Assisted Hand Lift
MULCH CAPABILITY	Optional MulchControl™	Optional MulchControl™	Optional MulchControl™
OVERALL LENGTH	75.1 in.	75.1 in.	75.1 in.
WIDTH (Deflector Raised)	49.0 in.	49.0 in.	54.0 in.
WEIGHT (No Fuel)	481 lb	486 lb	522 lb
WARRANTY	**3-Year/200-Hour	**3-Year/200-Hour	**3-Year/200-Hour

\*Engine HP is provided by the engine manufacturer to be used for comparison purposes only. Actual operating HP will be less. Refer to the engine manufacturer's website for additional information.  
 \*\*Term limited to years or hours used, whichever comes first, and varies by model. See the LIMITED WARRANTY FOR NEW JOHN DEERE TURF AND UTILITY EQUIPMENT at JohnDeere.com for details.



For a full list of equipment specs, current inventory, buy online, online credit applications & more, visit us at [www.JamesRiverEquipment.com](http://www.JamesRiverEquipment.com)



©James River Equipment (1/2024)

# Riding Lawn Mowers S100 & S200 Series



JOHN DEERE



## S100 Series

**Mower Decks -**  
42 in. to 54 in. Edge™ Mower Decks,  
1 in. to 4 in. cutting heights with 1/4 in. adjustments

**Adjustable Seats -**  
11 in. to 15 in. adjustable seats with suspension

**Drive Train -**  
Maintenance-free dual pedal hydrostatic transmission

**Single Cylinder & V-Twin Engines -**  
17.5-24HP, air-cooled with replaceable oil filters

**Productivity -**  
Maximum forward mowing speed, 5.5 mph

**Warranty -**  
2-year/120 hour warranty\*\*

*Proudly made in Greeneville, TN, USA*



## Key features (varies by model):



Two-pedal hydrostatic transmissions make maneuverability smooth & simple.



Adjustable open-back seats will help you enjoy the mow on the hottest of days.




Fuel gauges and hour meters help keep your maintenance needs in constant view.



Easy service access points makes maintenance simple, clean & efficient.



Solid steel, stamped decks are meticulously designed to deliver a superior cut.

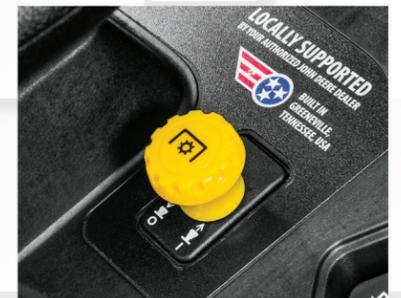

Electronic mower deck engagements increase efficiency with the pull of a button.

## S200 Series

**Mower Decks -**  
42 in. to 48 in. Accel Deep™ Mower Decks,  
1 in. to 4 in. cutting heights with 1/4 in. adjustments

**Adjustable Seats -**  
15 in. tool-free adjustable seats with open back

**Drive Train -**  
Maintenance-free dual pedal hydrostatic transmission

**V-Twin Cyclonic & Kawasaki Engines -**  
21.5-22HP, air-cooled with replaceable oil filters

**Productivity -**  
Maximum forward mowing speed, 5.5 mph

**Warranty -**  
3-year/200 hour warranty\*\*

*Proudly made in Greeneville, TN, USA*



## Most popular attachments (varies by model):



Utility carts from 7 cu. ft. and up make big jobs easy.



Stay in the shade with a quick-mounting sun canopy.



Pull-type spin spreaders to maximize your lawn's potential.



MulchControl™ attachment with blades make mulching quick & easy.



Large capacity material collection systems to bag in bulk.

**Ask about our  
Extended Warranty  
Protection Plans,  
starting at just  
\$199!**